

BRAVO DP

undersink filters for drinking water at its best


BRAVO DP performs Patented and Registered Model Housings.

Thanks to the single head design, BRAVO DP DUO and TRIO have no need for connections nor fittings in between the housings, no work for connections and no risk of leaking. The housing head is stronger and more reliable than ever.

In addition, thanks to the design, the width is dramatically reduced saving space for the installation.

MAX WORKING PRESSURE 8 BAR

MAX WORKING TEMPERATURE 45°C

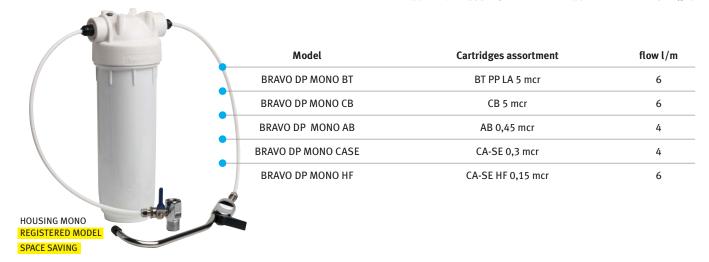

Model	Cartridges assortment	flow l/m	
BRAVO DP DUO FA-LA	FA 5 mcr + LA	6	AV
BRAVO DP DUO FA-CB	FA 5 mcr + CB 5 mcr	6	
BRAVO DP DUO FA-AB	FA 5 mcr + AB 0,45 mcr	4	1
BRAVO DP DUO FA-CASE	FA 5 mcr + CA-SE 0,3 mcr	4	
BRAVO DP DUO FA-HF	FA 5 mcr + CA-SE HF 0,15 mcr	6	-
BRAVO DP DUO PP-LA	PP 5 mcr + LA	6	
BRAVO DP DUO PP-CB	PP 5 mcr + CB 5 mcr	6	
BRAVO DP DUO PP-AB	PP 5 mcr + AB 0,45 mcr	4	
BRAVO DP DUO PP-CASE	PP 5 mcr + CA-SE 0,3 mcr	4	916
BRAVO DP DUO PP-HF	PP 5 mcr + CA-SE HF 0,15 mcr	6	HOUSING DUO REGISTERED MODI





	Model	Cartridges assortment	flow l/m
1	BRAVO DP TRIO FA-CB-AB	FA 5 mcr + CB 5 mcr + AB 0,45 mcr	4
	BRAVO DP TRIO FA-LA-CASE	FA 5 mcr + LA + CA-SE 0,3 mcr	4
	BRAVO DP TRIO FA-LA-HF	FA 5 mcr + LA + CA-SE HF 0,15 mcr	6
1	BRAVO DPTRIO FA-CB-HF	FA 5 mcr + CB 5 mcr + CA-SE HF 0,15 mcr	6
	BRAVO DP TRIO PP-CB-AB	PP 5 mcr + CB 5 mcr + AB 0,45 mcr	4
	BRAVO DP TRIO PP-LA-CASE	PP 5 mcr + LA + CA-SE 0,3 mcr	4
	BRAVO DPTRIO PP-LA-HF	PP 5 mcr + LA + CA-SE HF 0,15 mcr	6
	BRAVO DP TRIO PP-CB-HF	PP 5 mcr + CB 5 mcr + CA-SE HF 0,15 mcr	6

Flow rate in litres per minute (I/m) is the average water flow from the dedicated tap (filtered water) using a new cartridge. The flow rate may vary in function of water quality and time in service (life-span) of the cartridges. Life-span is the average working life of the cartridge. It depends on the water quality, which is an extremely variable factor: life-span is indicated for a mains water supply with average european characteristics. BRAVO DP are not potable water-makers: control the water quality before installation.



BRAVO DP CASE

Portable undersink filters for drinking water at its best

BRAVO DP CASE performs the Patented and Registered DP Trio housings.

This model can be used under the kitchen sink, keeping the housing and connection sheltered and protected by its robust case. Portability and easy connections make this filter a convenient solution when moving to other places where water filtration is required: bring your pure water along with you ever!

MAX WORKING PRESSURE 8 BAR

MAX WORKING TEMPERATURE 45°C

Model	Cartridges assortment	flow l/m
BRAVO DP CASE TRIO FA-CB-AB	FA 5 mcr + CB 5 mcr + AB 0,45 mcr	4
BRAVO DP CASE TRIO FA-LA-CASE	FA 5 mcr + LA + CA-SE 0,3 mcr	4
BRAVO DP CASE TRIO FA-LA-HF	FA 5 mcr + LA + CA-SE HF 0,15 mcr	6
BRAVO DP CASE TRIO FA-CB-HF	FA 5 mcr + CB 5 mcr + CA-SE HF 0,15 mcr	6
BRAVO DP CASE TRIO PP-CB-AB	PP 5 mcr + CB 5 mcr + AB 0,45 mcr	4
BRAVO DP CASE TRIO PP-LA-CASE	PP 5 mcr + LA + CA-SE 0,3 mcr	4
BRAVO DP CASE TRIO PP-LA-HF	PP 5 mcr + LA + CA-SE HF 0,15 mcr	6
BRAVO DP CASE TRIO PP-CB-HF	PP 5 mcr + CB 5 mcr + CA-SE HF 0,15 mcr	6



accessories included











KIT BRAVO D

O-RING

-X- SPANNER

-S- WALL BRACKET for BRAVO DP MONO

-DUO- WALL BRACKET for BRAVO DP DUO

-TRIO- WALL BRACKET for BRAVO DP TRIO

accessories available



METAL WALL BRACKET DUO complete with screws

UV 600 Stainless steel UV sterilizer. A/C 220/240 V - 50/60 Hz. Electrical absorbtion 16 W. UV-C dose $> 30.000 \mu \text{W/cm}_2$. Flow rate 10 l/m. In/out connection 1/8' male threads. Average lamp life-time 9.000 h. CE approved.




METAL WALL BRACKET TRIO complete with screws

UV PL 240



-DP- Base





DEDICATED TAP LUX Brass chromium-plated dedicated tap with ceramic mixer, high finish - Lux design. NSF approved.

cartridges assortment

FA 5 micron

SEDIMENT. Wound polypropylene filter. Filtration of sand, scales, lime, rust, fine particles. Lifespan: 3-6 months.



PP/CPP 5 micron

SEDIMENT. Melt-blown polypropylene grooved (PP) or smooth (CPP) filter: high efficiency filtration of fine particles, rust, lime, sand, scales. Life-span: 3-6 months.

BT PP LA 5 micron

CE, ROHS approved.

SEDIMENT G.A.C. Melt-blown polypropylene filter and Granular Activated Carbon. Filtration of fine particles, rust, lime, sand, scales; reduction of chlorine (bad tastes, odours) and chloride pollutants (pesticides, solvents, etc). Life-span: 3 months.

UV-C dose $> 30.000 \mu \text{W/cm}_2$.



CARBON G.A.C. Container with Granular Activated Carbon. Reduction of chlorine (bad tastes, odours) and chloride pollutants (pesticides, solvents, etc). Lifespan: 3 months.

AB 0,45 micron

CERAMIC. Filtration of very fine particles and some micro-organisms. Life-span: 6-12 months. Maintenance: surface scraping every 2-3 months.

CB 5 micron

CARBON BLOCK. Filtration of fine particles (rust, lime, sand, scales); reduction of chlorine (bad tastes, odours) and chloride pollutants (pesticides, solvents, etc). Life-span: 3-6 months.

CA-SE 0,3 micron

CARBON BLOCK. Filtration of very fine particles and some micro-organisms; reduction of chlorine (bad tastes, odours) and chloride pollutants (pesticides, solvents, etc). Life-span: 6-12 months. Maintenance: surface scraping every 2-3 months.



CA-SE HF 0,15 micron

CARBON BLOCK. Microfiltration with "hollow-fibre" capillary membranes (STER-O-TAP®) of very fine particles and some micro-organisms; reduction of chlorine (bad tastes, odours) and chloride pollutants (pesticides, solvents, etc). Lifespan: 6 months. Maintenance: surface scraping every 2-3 months.

variants

Cartridges available on demand

GAC-Ag Granular Activated Carbon Silver treated. QA-AF Anti-nitrate ionic exchange resin. KDF Heavy-metals and chlorine reduction medium. CA-SE HF-U Carbon block with "hollow-fibre" ultra-filtration element at 0,02 micron.

Cartridges with double O-ring quick-fit system BX.

Remark:

BRAVO DP housings fit to BX and standard SX (DOE) cartridges.






transparent CASE





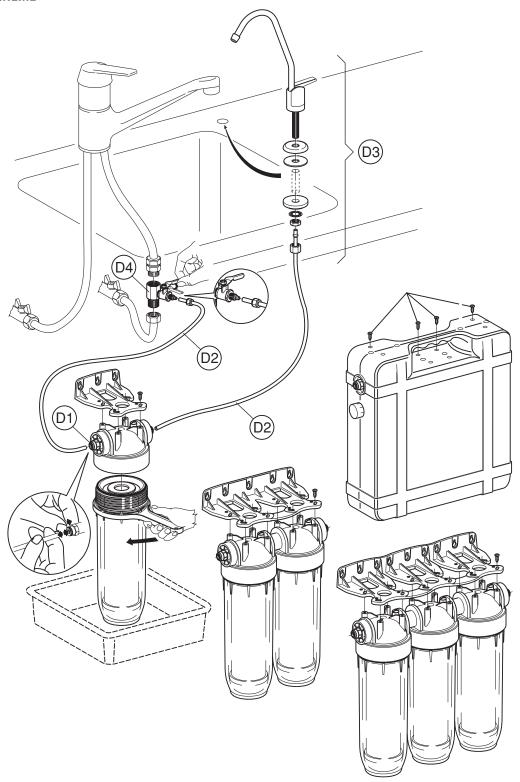

SPARE PARTS FOR KIT BRAVO DP



(D1) MALE STRAIGHT JUNCTION 1/4" x 1/4"



(D2) POLYETHYLENE HOSE 1/4"



(D3) DEDICATED TAP



